



**Low Ash Metallurgical Coke
-Carbon for Steel**

Size : 0. mm, 3-8 mm, 10-30 mm,
25-40 mm, 80-100 mm, 100 mm + etc.
Fixed Carbon : 70 % to 85 %



Wood Charcoal

Particle Size : 5 mm to 30 mm
Ash : 3 to 5 %
Volatile Matter : 15 to 20 %
Total Moisture : 10 % Max.
Colour : Black
Fixed Carbon : 75 to 80 %

Petroleum Coke

Powdered & Lumps
Sulfur : up to 6 - 7 %
Sulfur : 3 - 4 % & below
Size : 0 - 15, 15 +
0 - 70 mm




Indonesian Steam Coal

Gross Calorific Value : 4800 - 6300
Kcal / Kg.



Petroleum Products

Furnace Oil : Indian PSU's & Imported
Light Diesel Oil : Indian PSU's & Imported
Bitumen : Indian PSU's & Imported

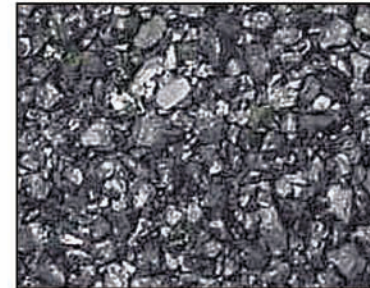

South African Steam Coal

Gross Calorific Value : 6000 - 6600
Kcal / Kg. (ADB)

Granular Activated Carbon

Particle Size : 4/8, 8/16, 12/30, etc.
Iodine Value : 500 mg./ gm.
Density : 0.500 + - 0.025
Total Moisture : 5 % max.
Hardness : 90
Ph : 9 - 10
Ash : 10 - 15 %



Calcined Petroleum Coke

Ash : 1 % Max.
Volatile Matter : 1 % Max.
Fixed Carbon : 95 % Min.
Total Moisture : 1% Max.

